


STU type

Shaft Support Rail II

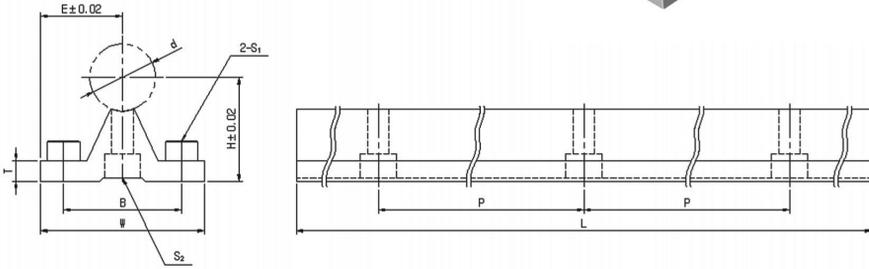

| Part No. | Shaft d | Dimensions | | | | | | | Mounting Dimensions | | | |
|----------|------------|------------|------|----|--|----|----------------|-----|---------------------|-----|----------------|----------------|
| | | H | E | W | L | T | h ₁ | θ | B | P* | S ₁ | S ₂ |
| STU16 | Φ16 | 27 | 21 | 42 | Max length 3m · Effective for long stroke application | 6 | 7 | 50° | 31 | 150 | M5 | M5 |
| STU20 | Φ20 | 31 | 25 | 50 | | 6 | 7 | 50° | 36 | 150 | M6 | M6 |
| STU25 | Φ25 | 36 | 26,5 | 53 | | 7 | 9 | 50° | 39 | 200 | M6 | M6 |
| STU30 | Φ30 | 43 | 33,5 | 67 | | 8 | 11 | 50° | 49 | 200 | M8 | M8 |
| STU40 | Φ40 | 55 | 37 | 74 | | 11 | 14 | 50° | 56 | 300 | M8 | M8 |

Note) P can be changed for customer requirement